

RESEARCH PAPER

Applying GMDH artificial neural network to predict dynamic viscosity of an antimicrobial nanofluid

Fatemeh Mohamadian ^{1*}, Leila Eftekhari ¹, Yashar Haghighi Bardineh ²

¹Post graduate student of pediatric Dentistry, Department of pediatric dentistry, Faculty of dentistry, Shahid Beheshti University of medical sciences, Tehran, Iran

²Department of Biomedical Engineering, Tehran Medical Branch, Islamic Azad University, Terhan, Iran

ABSTRACT

Objective (s): Artificial Neural Networks (ANN) are widely used for predicting systems' behavior. GMDH is a type of ANNs which has remarkable ability in pattern recognition. The aim the current study is proposing a model to predict dynamic viscosity of silver/water nanofluid which can be used as antimicrobial fluid in several medical purposes.

Materials and Methods: In order to have precise model, it is necessary to consider all influential factors. Temperature, concentration and size of nano particles are used as input variables of the model. In addition, GMDH artificial neural network is applied to design a proper model. Data for modeling are extracted from conducted experimental studies published in valuable journals.

Results: The dynamic viscosity of Ag/water nanofluid is precisely modeled by using GMDH. The obtained values for R-squared is equal to 0.9996 which indicates perfect precision of the proposed model. In addition, the highest relative deviation for the model is 2.2%. Based on the values of these statistical criteria, the model is acceptable and very accurate.

Conclusion: GMDH artificial neural network is reliable approach to predict dynamic viscosity of Ag/water nanofluid by using temperature, concentration and size of particles as input data.

Keywords: Dynamic viscosity, Irrigant, Medical, Nanofluid

How to cite this article

Mohamadian F, Eftekhari L, Haghighi Bardineh Y. Applying GMDH artificial neural network to predict dynamic viscosity of an antimicrobial nanofluid. *Nanomed J.* 2018; 5(4): 217-221. DOI: 10.22038/nmj.2018.05.00005

INTRODUCTION

Nanotechnology is widely applicable in several fields of science [1,2] some of them are more influential such as temperature, size and type of nano particles and volumetric concentration. In this study, artificial neural network as well as least square support vector machine (LSSVM). By applying nano-based materials, it is possible to achieve high efficiency, compact sizes and appropriate mechanical properties [3]. Several studies have focused on the applications of nanotechnology in engineering systems to obtain better working conditions [4,5]. Several parameters are influential in the properties of nano materials such as their size, manufacturing process, working temperature and etc. These factors must be considered in modeling their properties to have accurate and

proper output.

In addition to engineering systems, nanotechnologies are applicable in medical and dental fields. By using nanofluids, such as nano-irrigant, effective disinfection is achievable. Based on a study conducted by Akbarianrad et al [6], nanotechnology has been utilized in dentistry for different purposes such as root canal irrigation and photosensitizer for photodynamic therapy. There are various researches concentrated on using nanofluids, which are prepared by dispersing nano-sized particles in base fluids. Atai et al [7] performed a study on nano-porous nano silica, which was thermally sintered, as filler in dental composite. The properties of the composite contained the nano filler were compared with the composites with micro fillers and the conventional available nano composite. Elastic module and their strength were evaluated by applying various models. In the study, nano-silica particles with 12

* Corresponding Author Email: Furstinfateme@gmail.com

Note. This manuscript was submitted on July 10, 2018; approved on August 18, 2018

nm diameter were thermally sintered to obtain nanofiller particles. The investigated material was a mixture of 70% wt of the nanofiller and Bis-GMA and TEGDMA. The microfiller utilized in the study contained micro-sized filler made of glass. Based on the obtained results, the composite with nano-sized materials had higher mechanical strength, and modulus of elastic compared with the composite filled with the micro-sized material.

Some nano particles such as silver, have antimicrobial property which can be utilized in medical treatments [8–10]. Silver nano particles are broadly utilized in various medical and dental applications due to their antibacterial and anti-inflammatory influences [11]. In addition, these nano particles are used in dental practice and integrated with restorative materials and agent to prevent formation of biofilms and decrease caries [12].

In order to simply use these nano particles, dispersing them in a base fluid such as water is an appropriate idea. Rodrigues et al [13], synthesized silver/water nanofluid. In the synthesis procedure, lactulose was utilized as reducing and stabilizing agent. Results revealed that the nanofluid had excellent antimicrobial performance.

Nanofluids properties depend on several factors such as temperature, synthesis process, concentration of solid phase, and size of nano particles. Several studies have focused on finding comprehensive relationship between these factors and nanofluids' properties [2,3].

Since dynamic viscosity of fluids affects the flow, pressure loss and wall shear stress, this property is considered in the current study. Size of silver particles, temperature of nanofluid and concentration are among the most influential factors in the determination of dynamic viscosity. Therefore, dynamic viscosity of the nanofluid can be predicted based on the values of these parameters.

Artificial neural networks are accurate approaches to model systems based on variables influence on their performance [14]. Group Method of Data Handling (GMDH) artificial neural network is a powerful approach for system recognition and modeling. This method is applied in various systems and shows its high accuracy as a predictive model. In the present study, GMDH is utilized to predict dynamic viscosity of Ag/water nanofluid as a function of temperature, size and concentration.

MATERIALS AND METHODS

GMDH artificial neural network is a predictive tool which is widely used for pattern recognition and modeling of systems. This type of neural network is self-organizing and one-directional which contains several layers with some neurons. All the neurons have similar structure with two inputs and one output. Each neuron process between input and output data via 5 weights and one bias as shown in Fig 1 and equation 1.

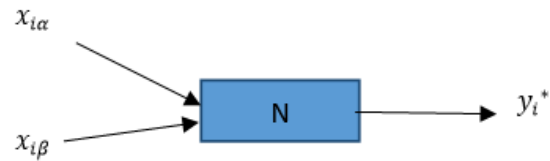


Fig 1. neuron structure in the network

$$y_{ik}^* = N(x_{i\alpha}, x_{i\beta}) = b^k + w_1^k x_{i\alpha} + w_2^k x_{i\beta} + w_3^k x_{i\alpha}^2 + w_4^k x_{i\beta}^2 + w_5^k x_{i\alpha} x_{i\beta} \quad (1)$$

$i = 1, 2, 3, \dots, N$

Where N refers to input and output data, $k = 1, 2, 3, \dots, C_m^2$ and $\alpha, \beta = \{1, 2, 3, \dots, m\}$. m is the number of neurons in the previous layer. The weight are obtained based on the linear least squares and utilized as constants in each neuron. In this network, neuron in previous sections or layers generate neurons. Some of these neurons will be removed to prevent divergence of the network. The criterion for eliminating and selecting the neurons in each layer is defined based on equation 2.

$$j \in \{1, 2, 3, \dots, C_m^2\}$$

$$r_j^2 = \frac{\sum_{i=1}^N (y_i - y_{ij}^*)^2}{\sum_{i=1}^N y_i^2} \quad (2)$$

In the above equation, m is the number of selected neurons in the previous layer. In order to correlate the input and output data, Volterra functional series is applied as [15]:

$$y = a_0 + \sum_{i=1}^n a_i x_i + \sum_{i=1}^n \sum_{j=1}^n a_{ij} x_i x_j + \sum_{i=1}^n \sum_{j=1}^n \sum_{k=1}^n a_{ijk} x_i x_j x_k + \dots \quad (3)$$

The utilized structure for the neurons is represented in equation 4:

$$y_i = G(x_{ip}, x_{iq}) = a_0 + a_1 x_{ip} + a_2 x_{iq} + a_3 x_{ip} x_{iq} + a_4 x_{ip}^2 + a_5 x_{iq}^2 \quad (4)$$

The constants in above equations are obtained based on the below relationships:

$$\text{Min} \sum_{k=1}^N [(f(x_{ki}, x_{kj}) - y_i^*)^2] \quad (5)$$

The above equation can be represented as:

$$Aa = Y \quad (6)$$

$$a = \{a_0, a_1, a_2, a_3, a_4, a_5\} \quad (7)$$

$$Y = \{y_1, y_2, y_3, \dots, y_M\}^T \quad (8)$$

The unknown vector is denoted by a , Y stands for the output vector, and A refers the two neurons belongs to each of M equation.

$$\begin{bmatrix} 1 & x_{1p} & x_{1q} & x_{1p}x_{1q} & x_{1p}^2 & x_{1q}^2 \\ 1 & x_{2p} & x_{2q} & x_{2p}x_{2q} & x_{2p}^2 & x_{2q}^2 \\ \dots & \dots & \dots & \dots & \dots & \dots \\ 1 & x_{Mp} & x_{Mq} & x_{Mp}x_{Mq} & x_{Mp}^2 & x_{Mq}^2 \end{bmatrix} \quad (9)$$

More details on GMDH procedure are represented in Refs [15–17].

RESULTS AND DISCUSSION

Based on the literature review, three main factors significantly affect dynamic viscosity of nanofluids. Studies have shown that increase in temperature results in lower dynamic viscosity of nanofluids which is attributed to higher energy of molecules and intermolecular distances [18]. Concentration of nano particles is another influential factor. Due to existence of solid phase, increase in concentration leads to higher viscosity [19]. In Fig 2, the effects of concentration and temperature on dynamic viscosity of the nanofluid is shown.

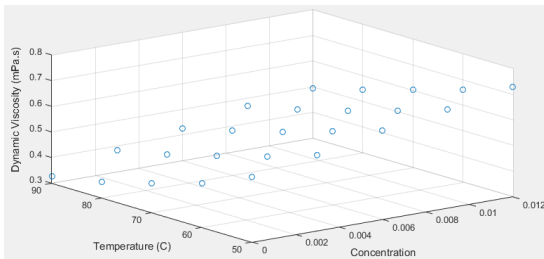


Fig 2. Effect of temperature and volumetric concentration on dynamic viscosity of Ag/water [20]

Table 1. Ranges of input variables

Variable	Min	Max
Size (nm)	40	63
Temperature (°C)	20	90
Volumetric Concentration	0	0.012

Size of nano particles is another factor which has impact on the thermophysical properties of nanofluids. Based on a comprehensive review study conducted by Koca et al [21], it was concluded there is discrepancy about the influence of size of nano particles on the dynamic viscosity of nanofluids. The aim the current study is determining the dynamic viscosity of Ag/water

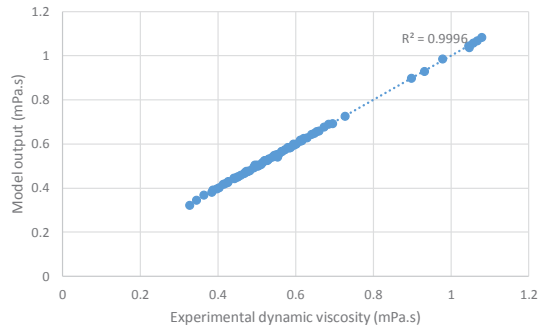


Fig 3. Experimental data vs model output

nanofluid as a function of temperature, concentration and size of nano particles. Data are extracted from experimental data represented in Refs [20,22–24]. The ranges of input variables are represented in table 1.

In order to model the dynamic viscosity of Ag/water nanofluid, 72 data sets were utilized. Approximately 80% of them used for training the network and 20% of them were applied for testing the model. The obtained correlation between input and output data by applying GMDH artificial neural network is represented in equation 10.

$$\begin{aligned} \text{Dynamic Viscosity} = & 2.06061 + \text{size} * \text{temperature} \\ & * 0.000944779 + \text{concentration} * \text{temperature} * \\ & (-0.00626814) + (\text{temperature})^2 * 3.45634 * 10^{-5} + \\ & \text{Size} * \text{concentration} * (-0.22393) + (\text{concentration})^2 * \\ & (-442.965) + (\text{size})^2 * (-0.000303035) + \text{temperature} * \\ & (-0.0698069) + \text{Concentration} 35.0541 + \text{size} * 0.00175957 \end{aligned} \quad (10)$$

comparison between obtained results by model and actual data is represented in Fig 3.

As shown in Fig 3, the obtained R-squared value for the proposed model is equal to 0.9996 which shows excellent accuracy of the model.

The experimental value and model output for each data index are illustrated in Fig 4.

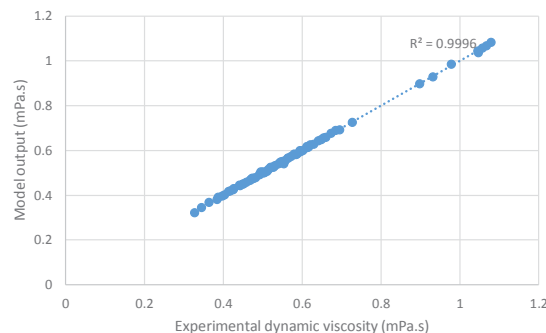


Fig 3. Experimental data vs model output

Another criterion for evaluation the precision of the predictive model, is relative deviation between

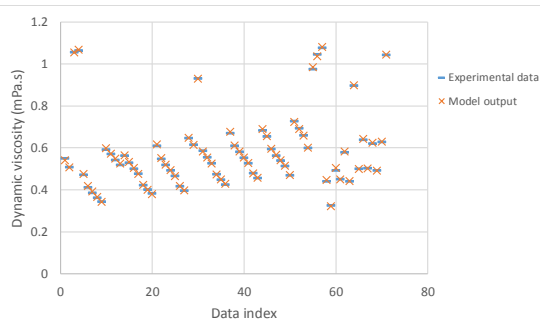


Fig 4. Dynamic viscosity vs data index

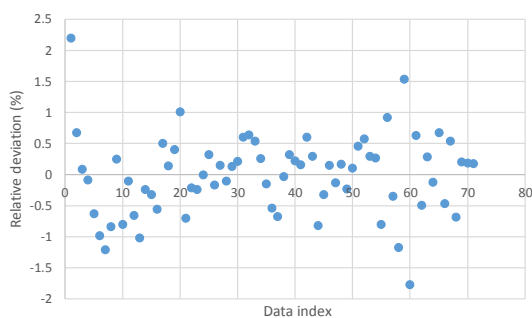


Fig 5. Relative deviation vs data index

actual data and model output. Relative deviation for each data index is represented in Fig 5.

As shown in Fig 4, the highest relative deviation is equal to 2.2% which demonstrate that the model is able to predict the dynamic viscosity precisely.

The accuracy of the designed model can be attributed to the selection of appropriate and influential factors affecting dynamic viscosity of the nanofluid.

Moreover, since the utilized data are selected from several experimental studies with different specifications, the model is comprehensive and cover wide range of input variables.

CONCLUSION

In the current study, dynamic viscosity of Ag/water nanofluid, applicable as an antimicrobial fluid, is modeled by using GMDH artificial neural network.

In order to have precise and comprehensive model, temperature, size of nano particles and concentration are selected as input variables. Results revealed that GMDH is an accurate method to predict dynamic viscosity of silver/water nanofluid.

The R-squared value of the model was 0.9996 and the highest relative deviation was equal to 2.2%.

ACKNOWLEDGMENTS

The authors would like to thank M. Zeinali for his helpful comments.

REFERENCES

- Ahmadi MH, Nazari MA, Ghasempour R, Madah H, Shafii MB, Ahmadi MA. Thermal Conductivity Ratio Prediction of Al₂O₃/water Nanofluid by Applying Connectionist Methods. *Colloids Surfaces A Physicochem Eng Asp*. 2018; 541: 154-164.
- Ahmadi MH, Ahmadi MA, Nazari MA, Mahian O, Ghasempour R. A proposed model to predict thermal conductivity ratio of Al₂O₃/EG nanofluid by applying least squares support vector machine (LSSVM) and genetic algorithm as a connectionist approach. *J Therm Anal Calorim*. 2018; 1-11.
- Ahmadi MH, Mirlohi A, Nazari MA, Ghasempour R. A review of thermal conductivity of various nanofluids. *J Mol Liq*. 2018; 265: 181-188.
- Nazari MA, Ghasempour R, Ahmadi MH, Heydarian G, Shafii MB. Experimental investigation of graphene oxide nanofluid on heat transfer enhancement of pulsating heat pipe. *Int Commun Heat Mass Transf*. 2018; 91: 90-94.
- Alhuyi Nazari M, Ahmadi MH, Ghasempour R, Shafii MB. How to improve the thermal performance of pulsating heat pipes: A review on working fluid. *Renew Sustain Energy Rev*. 2018; 91: 630-638.
- Akbarianrad N, Mohammadian F, Alhuyi Nazari M, Rahbani Nobar B. Applications of nanotechnology in endodontic: A Review. *Nanomed J*. 2018; 5(3): 121-126.
- Atai M, Pahlavan A, Moin N. Nano-porous thermally sintered nano silica as novel fillers for dental composites. *Dent Mater*. 2012; 28(2): 133-145.
- Cremer L, Gutierrez J, Martinez J, Materon LA, Gilkerson R, Xu F, Lozano K. Development of antimicrobial chitosan based nanofiber dressings for wound healing applications. *Nanomed J*. 2018; 5(1): 6-14.
- Ghasemi SM, Dormaneh B, Hosseini Abari A, Aliasghari A, Farahnejad Z. Comparative characterization of silver nanoparticles synthesized by spore extract of *Bacillus subtilis* and *Geobacillus stearothermophilus*. *Nanomed J*. 2018; 5(1): 46-51.
- Pirtarighat S, Ghannadnia M, Baghshahi S. Antimicrobial effects of green synthesized silver nanoparticles using *Melissa officinalis* grown under in vitro condition. *Nanomed J*. 2017; 4(3): 184-190.
- Alabdulmohsen Z, Saad A. Antibacterial effect of silver nanoparticles against *Enterococcus faecalis*. *Saudi Endod J*. 2017; 7(1): 29.
- Rodrigues CT, de Andrade FB, de Vasconcelos LRSM, Midena RZ, Pereira TC, Kuga MC, Duarte MAH, Bernardini N. Antibacterial properties of silver nanoparticles as a root canal irrigant against *Enterococcus faecalis* biofilm and infected dentinal tubules. *Int Endod J* 2018.
- Mollick MMR, Bhowmick B, Maity D, Mondal D, Roy I, Sarkar J, Rana D, Acharya K, Chattopadhyay S, Chattopadhyay D. Green synthesis of silver nanoparticles-based nanofluids and investigation of their antimicrobial activities. *Microfluid Nanofluidics*. 2014; 16(3): 541-551.
- Ahmadi MH, Tatar A, Alhuyi Nazari M, Ghasempour R, Chamkha AJ, Yan W-M. Applicability of connectionist

- methods to predict thermal resistance of pulsating heat pipes with ethanol by using neural networks. *Int J Heat Mass Transf.* 2018; 126: 1079–1086.
15. Ahmadi MH, Ahmadi MA, Mehrpooya M, Rosen MA. Using GMDH neural networks to model the power and torque of a stirling engine. *Sustain.* 2015; 7(2): 2243–2255.
 16. Kasaeian A, Ghalamchi M, Ahmadi MH, Ghalamchi M. GMDH algorithm for modeling the outlet temperatures of a solar chimney based on the ambient temperature. *Mech Ind.* 2017; 18(2): 216.
 17. Pourkiaei SM, Ahmadi MH, Hasheminejad SM. Modeling and experimental verification of a 25W fabricated PEM fuel cell by parametric and GMDH-type neural network. *Mech Ind.* 2016; 17(1): 105.
 18. Soltani O, Akbari M. Effects of temperature and particles concentration on the dynamic viscosity of MgO-MWCNT/ethylene glycol hybrid nanofluid: Experimental study. *Phys E Low-dimensional Syst Nanostructures.* 2016; 84: 564–570.
 19. Ghasemi S, Karimipour A. Experimental investigation of the effects of temperature and mass fraction on the dynamic viscosity of CuO-paraffin nanofluid. *Appl Therm Eng.* 2018; 128: 189–197.
 20. Godson L, Lal DM, Wongwises S. Measurement of Thermo Physical Properties of Metallic Nanofluids for High Temperature Applications. *Nanoscale Microscale Thermophys Eng.* 2010; 14(3): 152–173.
 21. Koca HD, Doganay S, Turgut A, Tavman IH, Saidur R, Mohammed I. Effect of particle size on the viscosity of nano fluids : A review. *Renew Sustain Energy Rev.* 2018; 82: 1664–1674.
 22. Alade IO, Oyehan TA, Popoola IK, Olatunji SO, Bagudu A. Modeling thermal conductivity enhancement of metal and metallic oxide nanofluids using support vector regression. *Adv Powder Technol.* 2018; 29(1): 157–167.
 23. Hemmat Esfe M, Saedodin S, Biglari M, Rostamian H. An experimental study on thermophysical properties and heat transfer characteristics of low volume concentrations of Ag-water nanofluid. *Int Commun Heat Mass Transf.* 2016; 74: 91–97.
 24. Nikkam N, Toprak MS. Fabrication and thermo-physical characterization of silver nanofluids: An experimental investigation on the effect of base liquid. *Int Commun Heat Mass Transf.* 2018; 91: 196–200.